

envirovent®

ECO DMEV

Decentralised Mechanical Extract Ventilation Unit



envirovent



ECO DMEV

Decentralised Mechanical Extract Ventilation Unit


CAN BE INSTALLED IN
ZONE 1



About

The ECO dMEV has been designed and developed to offer the market a constant volume, continuously running decentralised extract fan to achieve the lowest power consumption, the lowest noise and the lowest life-cycle costs.

- Constant volume, continuously running extract ventilation with adjustable trickle speed
- Fitted with low watt DC motors for minimum energy consumption down to 1.5 Watts
- Incredibly quiet running below 20 dB(A)
- SAP PCDB Listed achieving a low Specific Fan Power of 0.28 W/l/s
- Low voltage version available
- 4 interchangeable front panel trims
- Timer, humidity sensor and pullcord models
- Complies with local building regulations
- One fan for all situations
- Ease of installation and commissioning of speed settings
- Stylish features
- Highly versatile, can be installed into walls and ceilings
- Ease of maintenance
- 2 year warranty

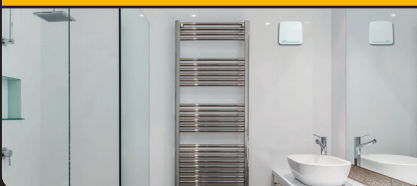

One Fan For All Situations

Building on the principles of the hugely successful and award-winning EnviroVent Filterless Extract Fan the ECO dMEV is ideal for all domestic applications, WCs, bathrooms, utility rooms and kitchens. It is a 100mm constant volume, continuously running extract fan, which can be fitted in wall, ceiling or panel installations.

ECO friendly and Ultra Quiet

Fitted with a DC motor mounted on silent elastic blocks, the fan delivers incredibly silent running below 20 dB(A) with exceptional performance and stylish features. Fully complying with Building Regulations and SAP PCDB Listed, the ECO dMEV ensures a significant contribution to maximising the reward in SAP for ventilation.

Stylish Design

Designed with style in mind, the ECO dMEV adds a touch of elegance to the modern bathroom or kitchen without compromising on performance or quality. The fan is supplied with smart interchangeable front panel trims in four colours.



Lowest Life-Cycle Costs

The ECO dMEV has been designed for ease of maintenance, achieving the lowest life-cycle costs. The motor compartment can be easily removed to be cleaned or replaced.

Easy Commissioning

The fan is easily commissioned at installation to be set at one of variable trickle speed settings ranging from 4-15 l/s to exactly meet the airflow requirements for specific applications and ensure the lowest energy consumption down to 1.5 Watts.

Low Voltage Bathroom Fan

For extra safety, the ECO dMEV is also

available in a low voltage 17V version. In addition to the standard ECO dMEV 17V, which can be boosted by an external switch, the same three models are available as the 230V version: the ECO dMEV 17V timer option, humidity sensor option with timer or pullcord with timer and humidity sensor.

'Sensorless' Technology

The EnviroVent ECO dMEV incorporates a unique "sensorless" constant volume technology. Using intelligent microprocessor controls and software, the in-duct centrifugal fan works in direct correlation with any resistance in the ductwork. When it senses any resistance it automatically adjusts itself to ensure that the commissioned airflow is always delivered and maintained. This means the fan is also self-commissioning - all the installer needs to do is set the unit to the required airflow, screw it to the wall and connect it up! It will commission itself automatically and perform over and above building regulations.

Bi-material Injection Moulding

The result of bi-material injection moulding is a high quality moulded plastic with a permanently attached rubber seal to safely house away all electrical components from any contaminants or humidity.

Powerful Centrifugal Performance

Meticulous research and development has gone into the design of the ECO dMEV to be able to incorporate a high powered, forward curved, "sensorless" constant volume centrifugal fan into the smallest of spaces. Most small dMEV's this size use an axial impeller. Axial fans can perform well if they encounter no resistance, however by adding any amount of pressure, they can struggle to perform and become noisy.

As the inlet of the ECO dMEV is oval and not round like other fans, this creates space for the dual inlet centrifugal motor assembly, meaning we can fit a

centrifugal fan inside a tiny footprint. This has never been achieved before in a dMEV making it the first fan of its size in the world to incorporate centrifugal technology. Following significant investment in the latest injection moulding machinery and tooling, EnviroVent are one of the only ventilation companies to be able to mould plastic and rubber in the same process.



Technical Data

Constant Air Volume		Absorbed Power [W]		SFP* [W/l/s]	Sound Pressure Level dB(A)**		Weight (Kg)
m ³ /h	l/s	Min.	Max.		Min.	Max.	
15	4	1.5	4.5	0.36	<20	23	0.57
22	6	1.8	4.7	0.29	<20	25	
30	9	2.2	5.1	0.26	20	28	
36	10	2.7	5.5	0.27	24	30	
45	13	3.5	6.0	0.31	28	33	
Maximum Air Volume - By means of switch							
60	17	4.3	5.6	0.09	32	35	

* Following SAP Q Standard (2.5 length of 100mm circular duct diameter, two 90° bends and GR-100 grille at the discharge - max. 20 Pa)

** Measured at 3m, in free field condition. The maximum sound pressure level is given at 40Pa



SAP Appendix Q Performance

Systems with rigid ductwork (installation only)

Unit configuration	LOCATION	FAN SPEED SETTING (m ³ /h)	FLOW RATE (l/s)	FLOW RATE WIND CONDITION (l/s)	SPECIFIC FAN POWER (W/l/s)	% REDUCTION OF TOTAL FLOW RATE
In room (Ducted)	Kitchen	45	14.3	14.2	0.38	1
In room (ducted)	Wet Room	20	8.5	8.2	0.29	4
Through wall	Kitchen	45	14.9	14.3	0.36	4
Through wall	Wet Room	20	8.7	8.2	0.28	6

Systems with flexible or mixed ductwork (installation only)

Unit configuration	LOCATION	FAN SPEED SETTING (m ³ /h)	FLOW RATE (l/s)	FLOW RATE WIND CONDITION (l/s)	SPECIFIC FAN POWER (W/l/s)	% REDUCTION OF TOTAL FLOW RATE
In room (Ducted)	Kitchen	45	14.6	14.4	0.38	1
In room (ducted)	Wet Room	20	8.5	8.2	0.29	4
Through wall	Kitchen	45	14.9	14.3	0.36	4
Through wall	Wet Room	20	8.7	8.2	0.28	6

Technical Specification

Product

The ECO dMEV shall be a constant volume, continuous running, decentralised Mechanical Extract Ventilation unit, designed to comply with Local Building Regulations. The low energy fan shall be supplied in a 230V format with 5 adjustable trickle speed settings ranging between 4-13 l/s. The fan shall also come supplied with four interchangeable front panel trims.

Application Suitability

The ECO dMEV shall be suitable for wall, ceiling or panel mounting in WC's, bathrooms and kitchens.

Performance

See SAP Appendix Q Performance table.

Installation

Full installation guide is enclosed with all products; or sent separately in advance - if required.

Motor

The motor shall be a 230V Low Watt DC motor, which is assembled on silent elastic blocks, fitted with sealed for life ball bearings for enhanced working life and exceptionally quiet running down as low as 20 dB(A).

Fan

The ECO dMEV shall incorporate a centrifugal fan designed to run continuously on trickle and constant volume, with the facility to boost to maximum air volume via a switch, pullcord or humidity sensor.

Servicing / Maintenance

The unit shall incorporate a filter gauze for ease of maintenance.

Warranty


The ECO dMEV shall be covered by a 2 year warranty.

Compliance


The fan shall be SAP PCDB Listed.



Performance Curve

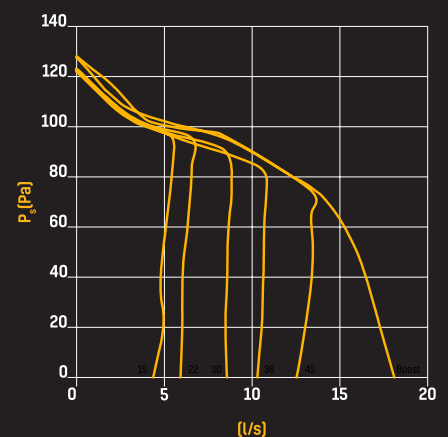

Dimensions (mm)

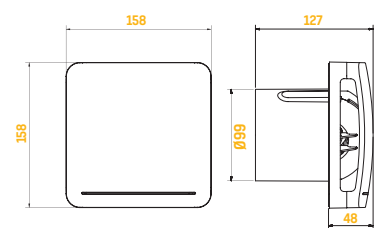

Options & Ancillaries

DESCRIPTION	CODE(S)
STANDARD WALL KIT	1RDEFWAK100
FIXED LOUVER GRILL	1R0GRILL100

envirovent®

Leaders in the manufacture of innovation and sustainable ventilation

EnviroVent Ltd
EnviroVent House
Hornbeam Business Park
Harrogate
HG2 8PA

T / 0345 27 27 807
F / 01423 301 022
E / enquiries@envirovent.com
W / www.envirovent.com

Due to our policy of continuous innovation and improvement, EnviroVent reserves the right to alter products specification and appearance without notice.

E&OE | MKT ENV396 - V1 - 21.01.20

Copyright © EnviroVent Ltd 2020



Follow us on
facebook



Follow us on
twitter



Watch us on
Youtube



Follow us on
Instagram



Follow us on
Pinterest



Find us on
LinkedIn

