
## Hamilton

## www.hamilton-litestat.com

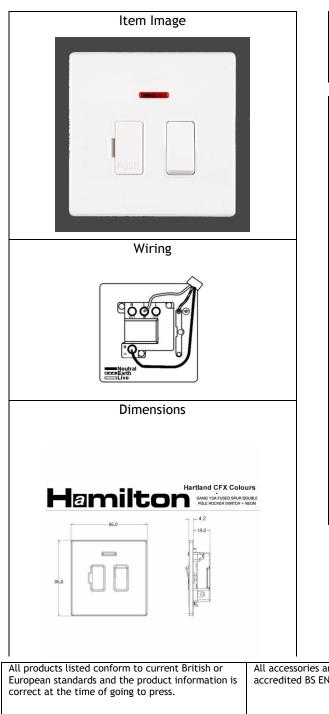

## 7WC SPN WH-W

Hartland CFX White 1 gang 13A Fused Spur Double Pole and Neon. Standard Insert will be White with a White surround.

| Primary Range             | Hartland CFX Colours                      |  |
|---------------------------|---|--|
| Insert Type               | Switched Fused Connection Units           |  |
| Plate Finish              | Bright White                              |  |
| Frame Finish              |   |  |
| Switch Colour             | White                                     |  |
| Body & Switch Trim        | White                                     |  |
| Height                    | Single = 86mm                             |  |
| Width                     | Single = 86mm                             |  |
| Depth                     | Single = 4.2mm                            |  |
| Fixing Hole Centres       | Box Fixing = 60.3mmBox Fixing = 60.3mm    |  |
| Minimum Wall Box Depth    | 35mm                                      |  |
| Wattage                   |   |  |
| Switched Poles            | Double                                    |  |
| Current Rating            | 13 Amp                                    |  |
| Voltage                   | 220/250V AC                               |  |
| Max load                  | 13 Amp                                    |  |
| Contact Gap Minimum       | 3mm                                       |  |
| Terminal Capacity 1       | 3 x 2.5mm2                                |  |
| Terminal Capacity 2       | 2 x 4mm2 Multi-Strand                     |  |
| Terminal Capacity 3       | 1 x 6mm2                                  |  |
| Terminal Capacity 4       |   |  |
| Terminal Capacity 5       |   |  |
| Earth Terminal Capacity 1 | 6 x 1mm2                                  |  |
| Earth Terminal Capacity 2 | 5 x 1.5mm2                                |  |
| Earth Terminal Capacity 3 | 3 x 2.5mm2                                |  |
| Earth Terminal Capacity 4 | 2 x 4mm2 Multi-Strand                     |  |
| Earth Terminal Capacity 5 | 1 x 6mm2                                  |  |
| Product Class 1           | Must be earthed                           |  |
| Ambient Operating         | -5° to +40°C                              |  |
| Temperature               |   |  |
| Recommended Location      | Indoor use only                           |  |
| Standard/Approval         | BS 1363                                   |  |
| Patents and Trademarks    | CFX is a Registered Trade Mark No 239866. |  |

| All products listed conform to current British or  | All accessories are manufactured under an        | It is the policy of the company to continually                 |
|--|--|--|
| European standards and the product information is correct at the time of going to press. | accredited BS EN ISO 9001 : 2008 Quality System. | improve products as part of our development                    |
| correct at the time of going to press.   |  | programme.<br>Therefore, we reserve the right to alter designs |
|  |  | and dimensions without prior notice.                           |
| Illustrations and diagrams are reproduced within   | Due to manufacturing processes we cannot         |  |
| the limitations of reproductions and printing  | guarantee an exact colour match and shadings of  | Correct as at August 2012                                      |
| processes are not binding.   | certain finishes.                                | E&OE   |

R Hamilton & Co Ltd • Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK T: +44 (0)1747 860088 • F: +44 (0)1747 861032 • E: info@hamilton-litestat.com www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory • AMH Hamilton (Secretary) Registered Office: Cedar House • Breckland • Linford Wood • Milton Keynes • MK14 6EX • Buckinghamshire Registered in London No. 941624 • VAT Registration No. 222 6607 84

(7WCSPNWH-W - Hartland CFX White 1 gang 13A Fused Spur Double Pole and Neon. Standard Insert will be White with a White surround.)

