

## Fuse Connection

A range of 13A fused connection units have been designed for the connection of refrigerators, water heaters, central heating boilers and other fixed appliances.

Illuminated and non illuminated options are available in both switched and un-switched fuse spurs.

Metal rockers and cable outlets are also available.

## Technical Information

- Conforms to BS 1363
- Fused connection units have a retained fuse carrier that is not removed during fuse replacement.
- All neon indicators are integrally wired into the product and do not require separate connection when installing.
- All Forbes and Lomax switches and sockets require British standard 35mm deep flush wall boxes.

## Available In:

The Invisible Lightswitch® Range

The Antique Bronze Range

The Stainless Steel Range

The Aged Brass Range

The Unlacquered Brass Range

The Nickel Silver Range

The Verdigris Range

The Paintable Range

### Rockers:


Antique Bronze  
Brass  
Nickel Silver  
Stainless Steel

### Inserts:

Black  
White



## Technical Specification

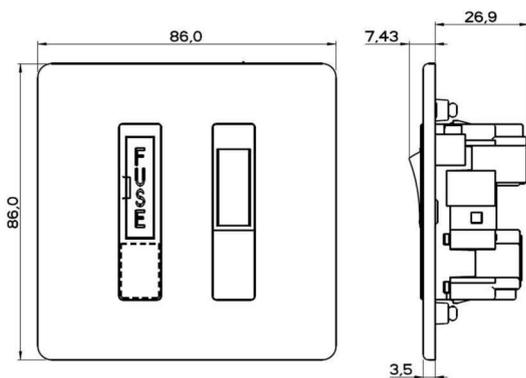

### Technical Specification

Supply Voltage:	250V AC
Current Rating:	13Amp
Terminal Capacities:	Live, Neutral and Earth: 3 x 2.5mm <sup>2</sup> 2 x 4 mm <sup>2</sup> 1 x 6 mm <sup>2</sup>
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max Installation Altitude:	2000 meters

## Plate Dimensions

86mm x 86mm