

Sockets

A full range of socket outlets and fused connections are available. Socket types include 13amp, 5amp, 2amp and floor sockets. 13amp sockets are available as double or single and can be switched or unswitched.

Technical Information

- Complies with BS 1363-2: 1995+A4:2014(And 1-3) Independent test certificates are held as follows:
Panel Mounted 1 gang switched and unswitched and 2 gang switched socket outlets - Certificate No: C12/43399-1
- Terminals markings present on housing for clearer identification. Switched socket outlets have double insulated rockers.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Single plates measure 86mm x 86mm and double plates measure 146mm x 86mm.
- All Forbes and Lomax switches and sockets require British standard 35mm deep flush wall boxes.

Available In:

The Invisible Socket Range
The Unlacquered Brass Range
The Antique Bronze Range
The Stainless Steel Range

The Nickel Silver Range
The Aged Brass Range
The Verdigris Range
The Paintable Range

Inserts:

Black
White

Matching metal rocker switches available on all switched versions.



Single 13amp socket in Stainless Steel



Single 13amp socket in Invisible with Brass



Double 13amp Socket in Nickel Silver



Double 13amp Socket in Verdigris




Double 13amp socket in Antique Bronze



Double 13amp socket in Unlacquered Brass

Technical Specification

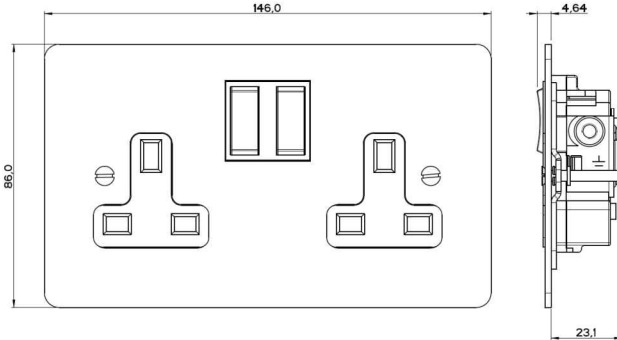


13Amp Twin Switched Socket Outlet

Depth:

Twin Un-Switched Socket – 23mm
 Twin Switched Socket – 23mm
 Switched Neon Socket – 23mm

Recommended Box Depth:

35mm Minimum
 Metal boxes to BS4662

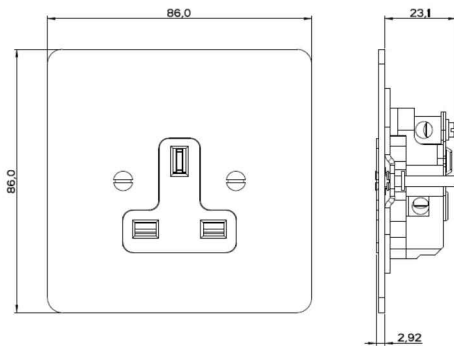

13Amp Single Unswitched Socket Outlet

Depth:


Single Un-Switched Socket – 23mm
 Single Switched Socket – 23mm
 Single Switched Neon Socket – 23mm

Recommended Box Depth:


35mm Minimum
 Metal boxes to BS4662

Technical Specification	
Supply Voltage:	250V AC
Current Rating:	13A per Socket Outlet
Terminal Capacity:	Live, Neutral & Earth 3 x 2.5mm ² 3 x 4mm ² 2 x 6mm ² (stranded)
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max Installation Altitude:	2000 meters

Plate Dimensions



1 Gang

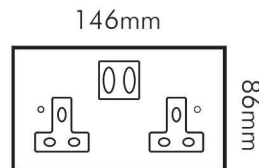

2 Gang