



RYEFIELD COMPOSITE FUSEBOARDS AND SPECIALS

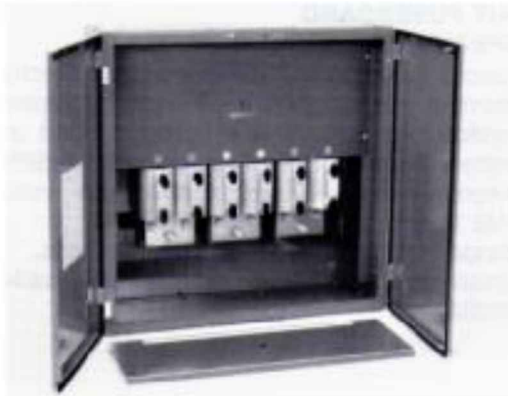


← J TYPE DIS FUSEBOARDS

Available in 2, 3 and 4 way TPN sizes with fuse ratings from 160 amp to 400 amp. Maximum busbar rating 600 amp. Spreader boxes available for larger cables. Type tested - Rated fused short circuit current 50KA ~ 415V. Dielectric Test 2.5KV for one minute.

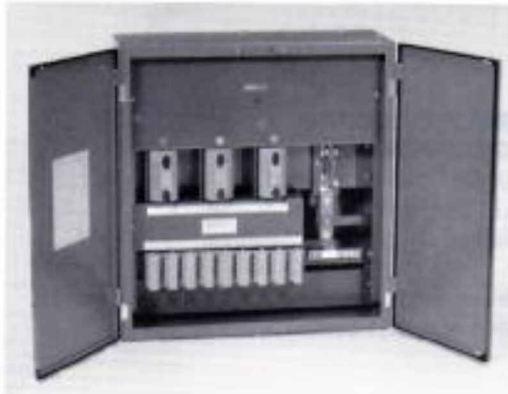

← COMPOSITE FUSEBOARDS

Special composite fuseboard combining both 'J' and 'R' type fuse units and complete with HRC fuse cartridges. Studs provided for SA crimp lugs as standard. Main busbars screened or shrouded as far as practical. Main busbars 400 amp rated with 630 amp option on larger fuseboards. Type tested - Rated fused short circuit current 50KA @ 415V. Dielectric Test 2.5KV for one minute.

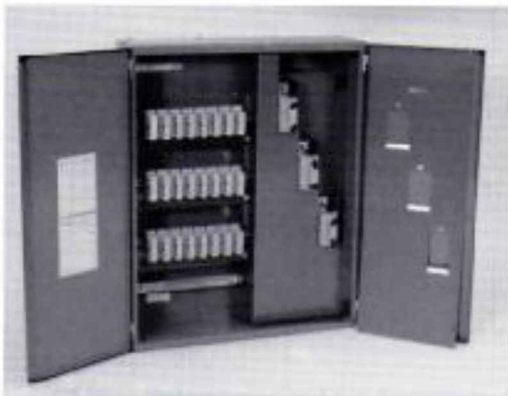

TO BE ADVISED

1. Main busbar rating i.e. service head.
2. Outgoing fuseway ratings
3. SC or 4C incomer determining spreader box requirements.

